




QH-500A



QH-500



QH-500AH

Applications:

Ideal for security lighting for the perimeters around the office building, warehouse, residential, sign lighting, display lighting and garage entrance.

Specification & features:

- Rigid aluminum die-cast housing & frame.
- Heat sink rib design on housing to maintain cooler operation temperature to maximize the lamp life.
- Durable polyester powder coating finish with option of BRONZE and WHITE color.
- Fully tempered glass lens.
- Silicon gasket lens assembly, provide no hassle during the relamping.
- 1/2" NPT die casting swivel arm fits to standard junction box.
- UL1598/CUL listed, Suitable for wet location.

QH-500A : With aluminum die-casting face frame.


QH-500 : No face frame. Use 2 stainless steel clips to clamp the tempered glass to the housing.

QH-500AH: Provide hood frame; no light pollution.


Quartz Halogen Flood light series:

Item No.	Lamp&Wattage	Lamp Base	Voltage	Ballast Type	Finish	Photocell	Certified
QH-500A	T-3 500W	R7S	120V	NIL	Bronze	NIL	UL/CUL
QH-300A	T-3 300W	R7S	120V	NIL	Bronze	NIL	UL/CUL
QH-500	T-3 500W	R7S	120V	NIL	Bronze	NIL	UL/CUL
QH-300	T-3 300W	R7S	120V	NIL	Bronze	NIL	UL/CUL
QH-500AH	T-3 500W	R7S	120V	NIL	Bronze	NIL	UL/CUL


QH-500

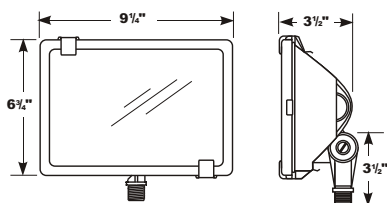

QH-500A

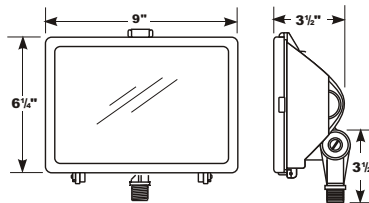

QH-500AH

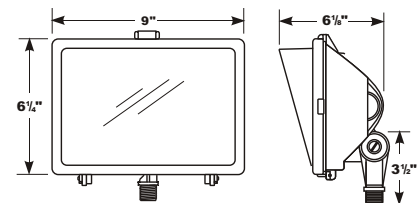



QH-1500A

Applications:

Both QH-1500A (1/2" NPT aluminum die-cast swivel arm for fit in standard junction box) and QH-1500U (Yoke bracket mount) are ideally for security lighting for the perimeters around the office building, warehouse, sign lighting, display lighting and garage entrance.

Specification:

- Rigid die-cast aluminum housing & frame.
- Easy relamping lens frame for glass assembly (Silicon gasket).
- The integrated heat dissipation ribs on the back housing keep the unit running at cooler temperature to maximum the lamp life.
- Durable polyester powder coating finish with BRONZE color.
- UL1598/CUL listed, Suitable for wet location.

Package Information:

Q'ty / Carton:	6PCS / CTN
Carton Size:	22 ³ / ₈ " x 15 ¹ / ₂ " x 19 ¹ / ₂ "
Cuft:	4.1'
N.W. / KGS:	15.2KG
G.W. / KGS:	17.5KG
Container Q'TY:	20': 1560PCS 40': 3120PCS

Quartz Halogen Flood light series:

Item No.	Lamp&Wattage	Lamp Base	Voltage	Finish	Certified
QH-1500A	T-3 1500W	R7S	120/208/240/277V	Bronze	UL/CUL

QH-1500A

