



WM 04



WM 05

Applications:

Ideal for security lighting, walkways, stairways, entrance & residential.

Specification & features:


- Rigid aluminum housing with durable polyester powder coating architectural bronze color.
- UV stabilized opal polycarbonate or opal glass globe.
- UL1598/CUL Listed, Suitable for wet location.
E-178685 for HID lamp.
E-183509 for fluorescent lamp.

WM04 & WM05 Series:


Item No.	Lamp&Watt.	Lamp Base	Voltage	Ballast Type	Finish	Photocell	Certified
WM04-35HPS	HPS35W	E26	120V	R-NPF	BN/WT	Optional	UL/CUL
WM04-50HPS	HPS50W	E26	120V	R-NPF	BN/WT	Optional	UL/CUL
WM04-13PLC	PLC13W	GX23-2	120V	NPF	BN/WT	Optional	UL/CUL
WM44-26PLS	2xPLS13W	GX23	120V	NPF	BN/WT	Optional	N/A
WM44-28PLC	PLC28W	GX23-3	120V	NPF	BN/WT	Optional	N/A
WM05-35HPS	HPS35W	E26	120V	R-NPF	BN/WT	Optional	UL/CUL
WM05-50HPS	HPS50W	E26	120V	R-NPF	BN/WT	Optional	UL/CUL
WM05-13PLS	PLS13W	GX23	120V	NPF	BN/WT	Optional	UL/CUL
WM05-26PLS	2xPLS13W	GX23	120V	NPF	BN/WT	Optional	UL/CUL

Note: BN = Architectural Bronze, WT = White

WM 04

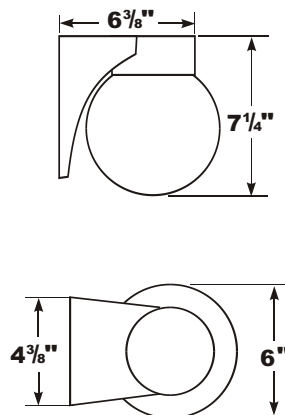

WM 44

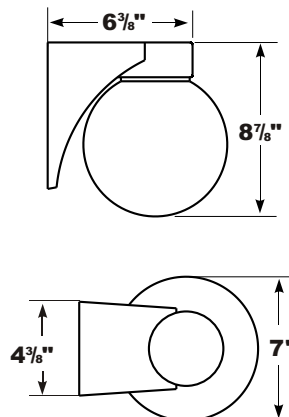

WM 05

