

### Applications:


Flood light for perimeters of building and warehouse.

### Specification & features:

- Rigid aluminum die-cast housing & frame.
- Fully tempered glass lens.
- Easy relamping lens assembly with stainless steel latch mechanism-No special tool required during the relamping.
- Durable polyester powder coating "Architectural Bronze" color for excellent anti-corrosion and UV resistance.
- 1/2"NPT aluminum die-casting swivel arm fits to standard junction box.
- Non tool bulb re-lamping.
- UL1598/CUL Listed, Suitable for wet location.

### FL01 Series:

Item No.	Lamp&Watt.	Lamp Base	Voltage	Ballast Type	Finish	Photocell	Certified
FL01-100MV	MV100W	E26	120V	HX-NPF	Bronze	Optional	UL/CUL
FL01-35HPS	HPS35W	E26	120V	R-NPF	Bronze	Optional	UL/CUL
FL01-50HPS	HPS50W	E26	120V	R-NPF	Bronze	Optional	UL/CUL
FL01-70HPS	HPS70W	E26	120V	R-NPF	Bronze	Optional	UL/CUL
FL01-100HPS	HPS100W	E26	120V	R-NPF	Bronze	Optional	UL/CUL
FL01-150HPS	HPS150W	E26	120V	R-NPF	Bronze	Optional	UL/CUL

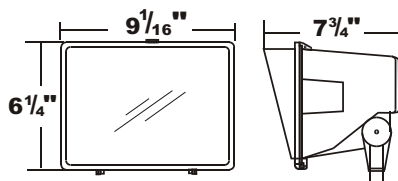

**FL11** has more decorative look with special hood frame; it is suitable for lighting application whenever "Low Glare" is concerned.

### FL11 Series:

Cat.Number.	Lamp&wattage	Lamp base	Voltage	Ballast type	Finish	Photocell	Certified
Refer to FL01 series, change only from FL01 to FL-11 to have FL-11 catalog number.							